



# STEEL REAR TIPPER

Model 55

## BODYWORK

- Tipper platform in galvanised steel sheet HX500, thickness 3 mm
- Rectangular tube side members, height 120 or 140 mm (depending on cylinder) and longitudinal spacers
- Sideboards in galvanised steel H350ZMA, height 350 mm, thickness 2 mm, fold-down, removable, interchangeable right/left
- Assisted lifting for the sideboard from length of 4260 mm
- Closing of embedded sideboards
- Steel H350ZMA front face, height 450 mm, thickness 2 mm
- Cab Protect in galvanised steel, with grille (4.5 mm section), removable and without top cap
- Rear door in galvanised steel H350ZMA, height 450 mm, thickness 2 mm, automatic opening by cam at 15° (doorway 520 mm)
- Rubber opening stops on sideboards and rear door
- Rear pillars in galvanised steel, thickness 3 mm, removable, with adjustable fixing bolt and conical fittings
- Polypropylene fender flares with supports in unwrought aluminium
- Approved aluminium side protection, black powder paint
- Nickel Zinc treated bolts (5 times more resistant than standard galvanising)
- Tipping shaft without lubrication (self-lubricating ring)
- Short dumping overhang: 250 mm
- Outer frame adapted to lashing

## SUBFRAME

- S355 steel tipper, thickness 4 mm
- Tipping by 3 or 4 expansion cylinder depending on length
- 48° tipping angle
- Electrically driven pump unit, 12 or 24 volts depending on the vehicle
- 7-litre tank
- Hydraulic pressure 180 bars
- Wired remote control in cab

## SAFETY

- Safety solenoid valve on cylinder
- Circuit breaker
- Safety stand
- Double safety device on the upper door hinges

## FINISH


- Galvanised elements: Steel sheet + 10 µm galvanisation + Shot blasting + 60 µm epoxy powder primer + 60 µm powder paint
- Non-galvanised elements: DKP metal sheet + Degreasing + Shot blasting + 60 µm powder primer + 60 µm powder paint

### WEIGHT (in kg)

Weights are for information. Supplier thickness tolerances for steel or aluminium do not enable us to guarantee a weight within a tolerance of +/- 10%.

### NET TIPPING CAPACITY (in metric tons)

Load uniformly distributed

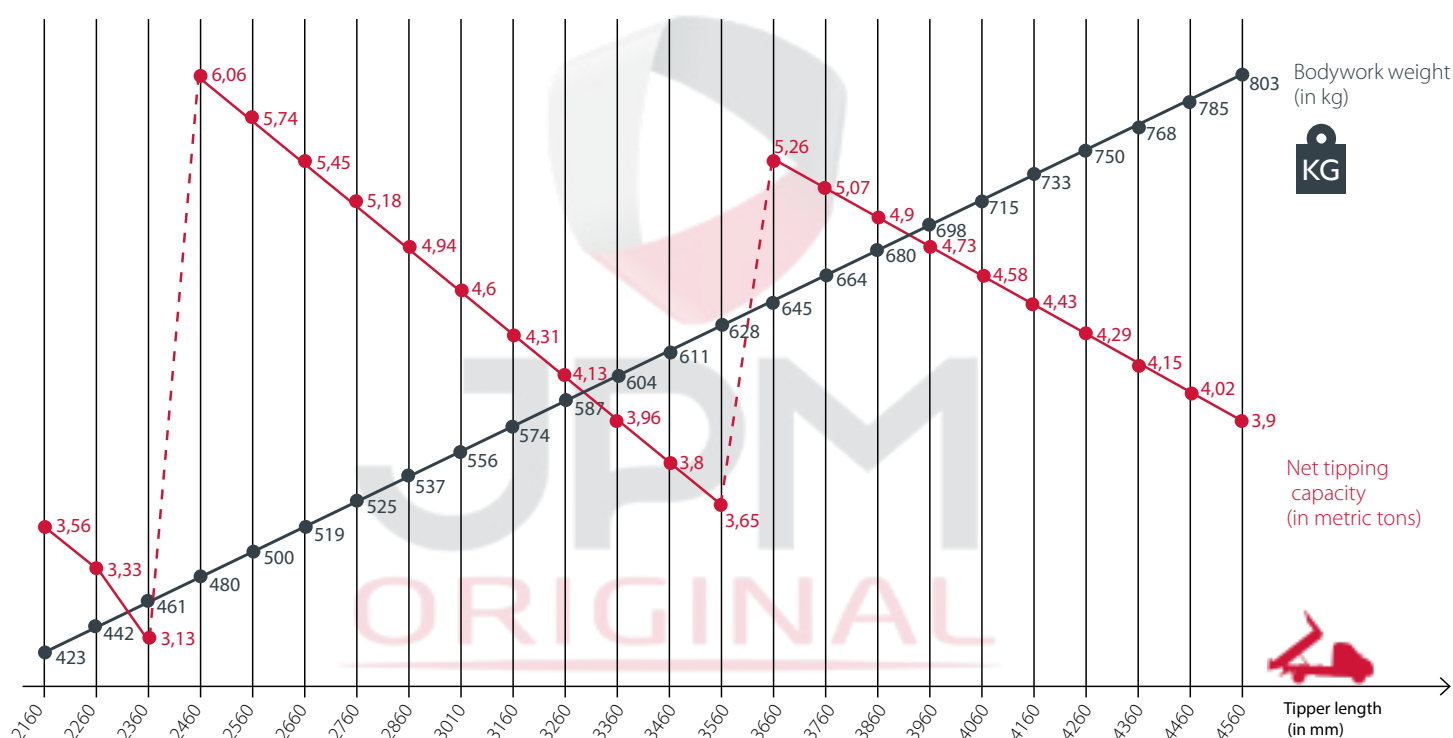

### AND GUARANTEE OF UP TO 5 YEARS FOR YOUR BODYWORK

#### 2-YEAR GUARANTEE

On purchasing  
your bodywork

#### 3-YEAR GUARANTEE

3<sup>rd</sup> year free  
after registering  
your bodywork

#### 5-YEAR GUARANTEE

JPM offers  
a 2-year guarantee  
extension