



MIXED ALUMINIUM REAR TIPPER Model 55



BODYWORK

- Tipper platform in high quality aluminium sheet: 5083 H16 thickness 3.5 mm
- Side members in extruded box-sections, thickness 3 mm, height 120 or 140 mm (depending on length) and outer frames in box-sections, thickness 3.5 mm, under the load surface
- Sideboards in extruded aluminium profile, height 400 mm (385 mm interior), double wall top and bottom, thickness 2.8 mm, single wall, thickness 3.5 mm in the centre, fold-down, removable, interchangeable (right/left)
- Locking handle incorporated into the thickness of the sideboards
- Front face, interior usable height 450 mm, double wall top and bottom, thickness 2.6 mm, single wall, thickness 3.5 mm in the centre
- Cab Protect in galvanised steel, with grille (4.5 mm section), removable and without top cap
- Aluminium rear door, height 450 mm, double wall top and bottom, thickness 2.8 mm, single wall, thickness 3.5 mm in the centre, automatic opening by cam of 15° (doorway 520 mm)
- Rubber opening stops on sideboards and rear door
- Rear pillars in galvanised steel, thickness 3 mm, removable, with 12 mm tightening fixing bolt and conical fitting
- Polypropylene fender flares with supports in unwrought aluminium
- Approved aluminium side protections, black powder paint
- Nickel Zinc treated bolts (5 times more resistant than standard galvanising)
- Tipping shaft without lubrication
- Outer frame adapted to lashing
- Short dumping overhang: 250 mm

SUBFRAME

- S355 steel tipper, thickness 4 mm
- Tipping by 3 or 4 expansion cylinder depending on length
- 48° tipping angle
- Electrically driven pump unit, 12 or 24 volts depending on the truck
- 7-litre tank
- Hydraulic pressure 180 bars
- Wired remote control in cab

SAFETY

- Safety solenoid valve on cylinder
- Circuit breaker
- Safety stand
- Double safety device on the sideboard handles
- Double safety device on the upper door hinges

FINISH

- Galvanised elements: Steel sheet + 10 µm galvanisation + Shot blasting + 60 µm powder primer + 60 µm powder paint
- Non-galvanised elements: DKP metal sheet + Degreasing + Shot blasting + 60 µm powder primer + 60 µm powder paint




WEIGHT (in kg)

Weights are for information. Supplier thickness tolerances for steel or aluminium do not enable us to guarantee a weight within a tolerance of +/- 10%.

NET TIPPING CAPACITY (in metric tons)

Load uniformly distributed

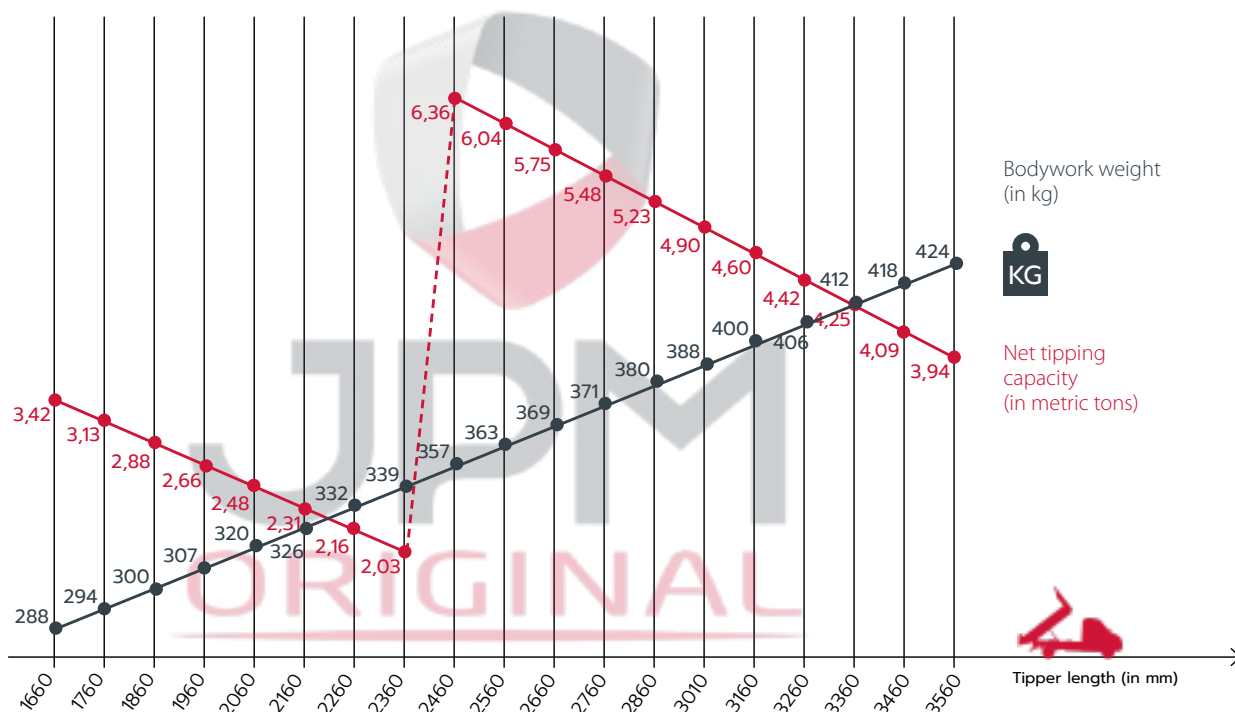

AND GUARANTEE OF UP TO 5 YEARS FOR YOUR BODYWORK

2-YEAR GUARANTEE

On purchasing
your bodywork

3-YEAR GUARANTEE

3rd year free
after registering
your bodywork

5-YEAR GUARANTEE

JPM offers
a 2-year guarantee
extension