



THE ALUMINIUM DROPSIDE

3.5 T to 5 T RANGE

BODYWORK

- Dropside platform in high quality aluminium sheet: 5083 H111 thickness 4 mm
- Aluminium U side members and transverse spacers
- Sideboards in tubular aluminium profile, height 350 mm, thickness 2.8 mm, fold-down and removable, interchangeable (right/left)
- 2 x 2 sideboards from an exterior length of 4300 mm
- Front face, height 450 mm, thickness 2.8 mm
- Cab shield in galvanised steel, with grille (4 mm section), removable
- Aluminium rear door, height 350 mm, thickness 2.8 mm
- Rubber opening stops on sideboards and rear door
- Rear pillars in aluminium, thickness 4 mm, removable, with 12 mm fixing bolt and straight fitting
- HDPE (High Density Polyethylene) wraparound mudguards with raw aluminium supports
- Approved aluminium side protection, black powder paint
- Geomet treated bolts (5 times more resistant than standard galvanising)
- Outer frame adapted to lashing
- Seals between elements that are not continuously welded


FINISH

- Shot blasting + 60 µm powder primer + 60 µm powder paint



WEIGHT (in kg)

Weights are for information. Supplier thickness tolerances for steel or aluminium do not enable us to guarantee a weight within a tolerance of +/- 10%.

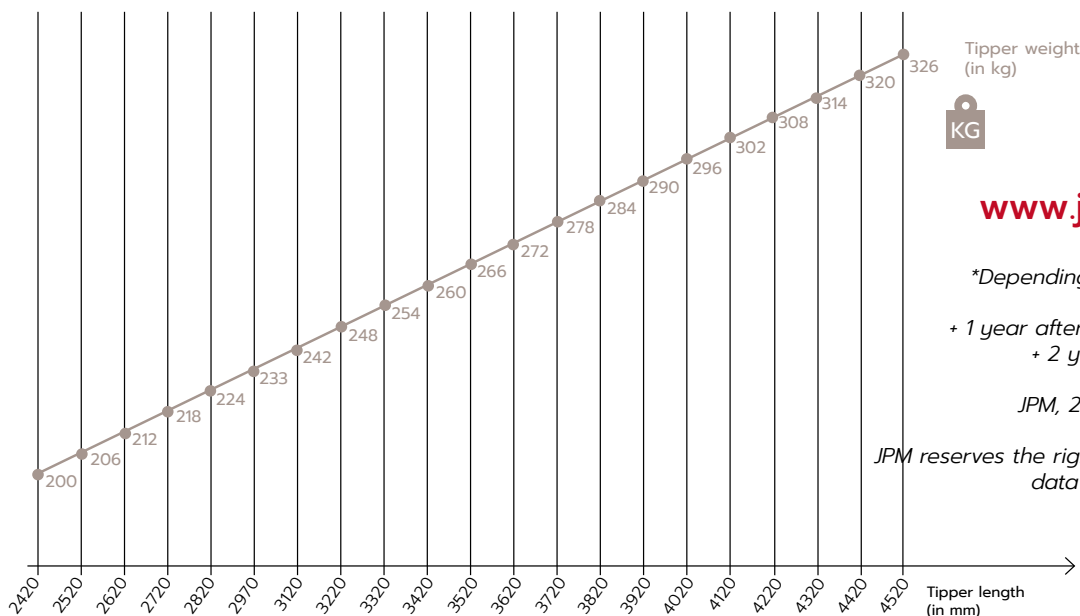

www.jpm-group.com

*Depending on guarantee conditions,
2 years on purchase
+ 1 year after registering the guarantee
+ 2 years on sale in the e-shop.

JPM, 2019 non-contractual photo.

JPM reserves the right to change this technical data sheet without prior notice.