

ALUMINIUM DROPSIDE WOOD PLATFORM

Model 55



BODYWORK

- Aluminium side members, thickness 4 mm
- Aluminium frame, thickness 3 mm
- Multi-ply wood platform, thickness 15 mm, non-skid surface, phenolic resin treatment
- Platform screwed onto 60 mm U-shaped crossbeams, crossbeams spaced at 440 mm intervals
- Retractable lashing rings (TÜV 800 DaN certified) incorporated into the edge, steel, spaced at 880 mm
- Aluminium front face, height 450 mm, welded to the platform
- Aluminium rear pillars, removable, with straight fitting
- · Anodised aluminium sideboards, thickness 25 mm, fold-down, removable, interchangeable, height 400 mm
- Locking handles incorporated into the ends of the sideboards
- Anodised aluminium rear door, height 400 mm
- Cab Protect with aluminium grille diameter 5 mm with frame in extruded profiles, removable and without top cap
- Polypropylene fender flares with supports in unwrought aluminium
- Approved aluminium side protection, black powder paint
- Nickel Zinc treated bolts (5 times more resistant than standard galvanising)

FINISH

- Anodised aluminium sideboards
- Aluminium elements: Shot blasting + 60 µm powder primer + 60 µm powder paint






ALUMINIUM DROPSIDE WOOD PLATFORM

Model 55

WEIGHT (in kg)

Weights are for information. Supplier thickness tolerances for steel or aluminium do not enable us to guarantee a weight within a tolerance of +/- 10%.

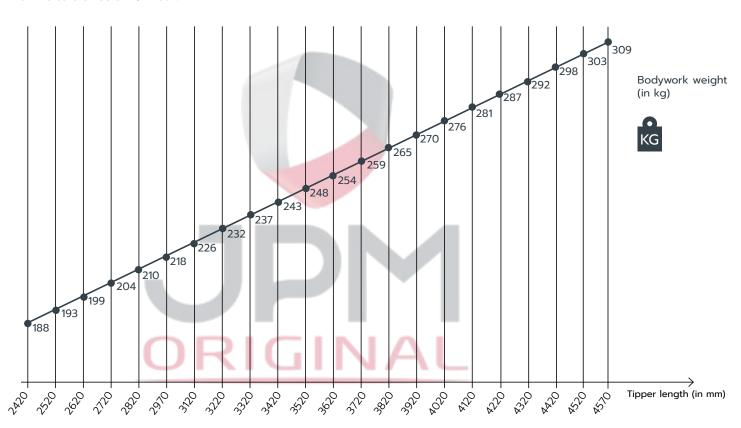

AND GUARANTEE OF UP TO 5 YEARS FOR YOUR BODYWORK



On purchasing your bodywork



3rd year free after registering your bodywork



JPM offers a 2-year guarantee extension



www.jpm-group.com