

STEEL DROPSIDE

Model 55



BODYWORK

- Dropside platform in steel sheet S355, thickness 3 mm
- U side members in steel S355, thickness 4 mm and transverse spacers
- Sideboards in steel H350ZMA, height 350 mm, thickness 2 mm, fold-down, removable, interchangeable right/left
- Assisted lifting for the sideboard from length of 4260 mm
- Closing of embedded sideboards
- Steel H350ZMA front face, height 450 mm, thickness 2 mm
- Cab Protect in galvanised steel, with grille (4 mm section), removable and without top cap
- Steel H350ZMA rear door, height 350 mm
- Rubber opening stops on sideboards and rear door
- Rear pillars in galvanised steel, thickness 3 mm, removable, with adjustable fixing bolt and straight fitting
- Polypropylene fender flares with supports in unwrought aluminium
- Approved aluminium side protection, black powder paint
- Nickel Zinc treated bolts (5 times more resistant than standard galvanising)
- Outer frame adapted to lashing

FINISH

• DKP metal sheet + Shot blasting + 60 μm zinc powder primer + 60 μm powder paint






STEEL DROPSIDE

Model 55

WEIGHT (in kg)

Weights are for information. Supplier thickness tolerances for steel or aluminium do not enable us to guarantee a weight within a tolerance of +/- 10%.

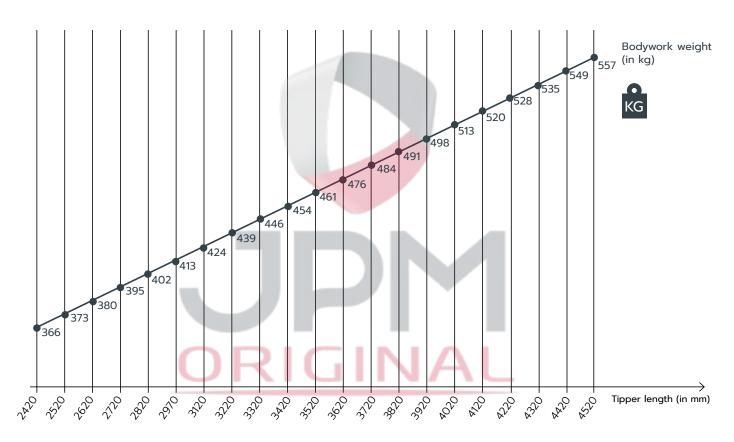

AND GUARANTEE OF UP TO 5 YEARS FOR YOUR BODYWORK



On purchasing your bodywork



3rd year free after registering your bodywork



JPM offers a 2-year guarantee extension



www.jpm-group.com