



TP STEEL THREE-WAY TIPPER

Model 55

BODYWORK

- Tipper platform in galvanised steel sheet HX500, thickness 3 mm
- Rectangular tube side members, height 120 or 140 mm (depending on compass) and longitudinal spacers
- Sideboards in galvanised steel S355, height 350 mm, thickness 2 mm, fold-down, removable
- 90° and 180° sideboard opening, sideboards mechanically locked at 90° offering continuous alignment between the platform and the sideboard
- Closing of embedded sideboards
- Steel H350ZMA front face, height 450 mm, thickness 2 mm
- Cab Protect in galvanised steel, with grille (4.5 mm section), removable and without top cap
- Rear door in galvanised steel H350ZMA, height 450 mm, thickness 2 mm, automatic opening by cam at 15° (doorway 520 mm)
- Rubber opening stops on sideboards and rear door
- Rear pillars in galvanised steel, thickness 3 mm, removable, with adjustable fixing bolt and conical fittings
- Polypropylene fender flares with supports in unwrought aluminium
- Approved aluminium side protection, black powder paint
- Nickel Zinc treated bolts (5 times more resistant than standard galvanising)
- Tipping on spherical roller bearings fitted with coded pins (avoiding any false manoeuvre)
- Short dumping overhang: 340 mm
- Outer frame adapted to lashing

SUBFRAME

- S355 steel tipper, thickness 4 mm
- Tipping by COMPASS CYLINDER (no overhang under the subframe)
- 48° tipping angle
- Electrically driven pump unit, 12 or 24 volts depending on the vehicle
- 3 or 7 litre tank
- Hydraulic pressure 320 bars
- Wired remote control in cab

SAFETY

- Safety solenoid valve on cylinder
- Circuit breaker
- Safety stand

FINISH

- Galvanised elements: Steel sheet + 10 µm galvanisation + Shot blasting + 60 µm powder primer + 60 µm powder paint
- Non-galvanised elements: DKP metal sheet + Degreasing + Shot blasting + 60 µm powder primer + 60 µm powder paint




WEIGHT (in kg)

Weights are for information. Supplier thickness tolerances for steel or aluminium do not enable us to guarantee a weight within a tolerance of +/- 10%.

NET TIPPING CAPACITY (in metric tons)

Load uniformly distributed

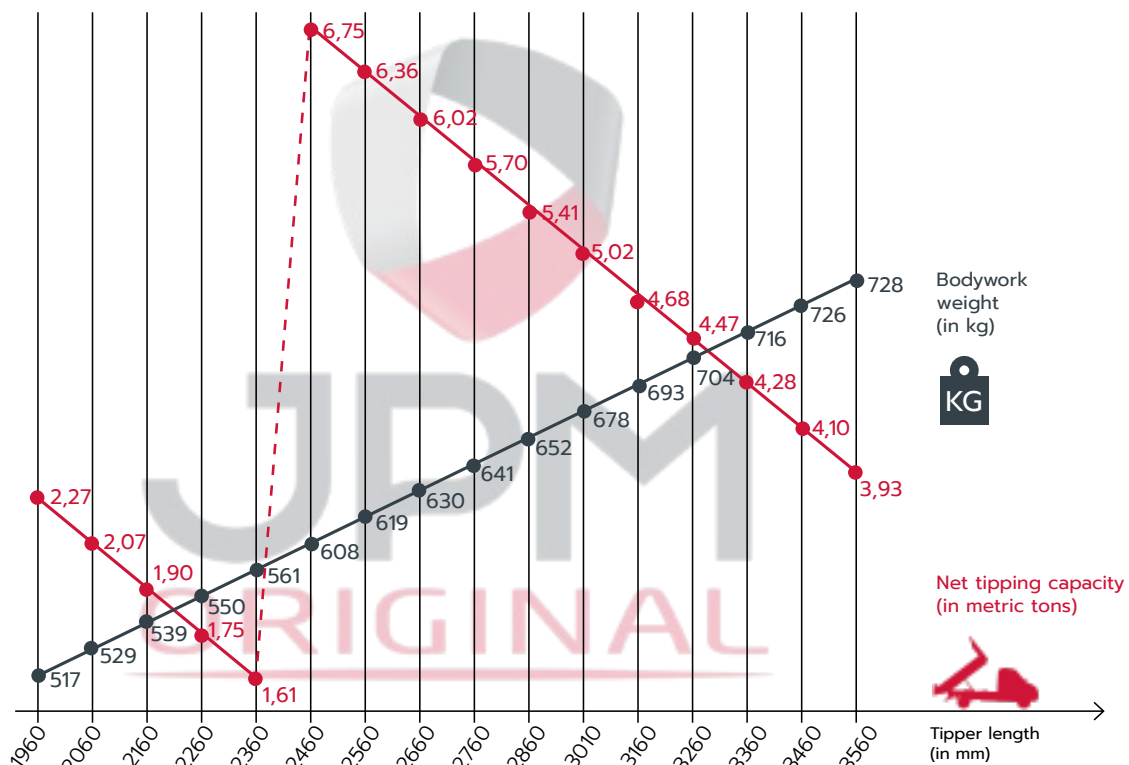

AND GUARANTEE OF UP TO 5 YEARS FOR YOUR BODYWORK

2-YEAR GUARANTEE

On purchasing your bodywork

3-YEAR GUARANTEE

3rd year free after registering your bodywork

5-YEAR GUARANTEE

JPM offers a 2-year guarantee extension